

LINEAR - HIGHBAY



**1-10V
Dimmable**


Product Specs :

Model No	VT-HBL-110W-850-2
SKU	854
Watts	110
LM/W	131
Lumen	14410
CCT	5000K
Voltage	100V-277V,347-480V
Frequency	50/60Hz
CRI	>80
PF	>0.9
Beam Angle	112x113
Operating Temperature	-20°C to 50°C
No. Of LED	336pcs
Warranty	5 Years
Life hours	50000 Hours
Dimension	2Ft
Certificates	    

Product Features:

- Powerful LED light source with unique design
- Excellent heat dissipation
- High Power factor
- Instant Light, Flicker Free
- Longevity and efficient lumen maintenance
- Easy Installation

Photometry

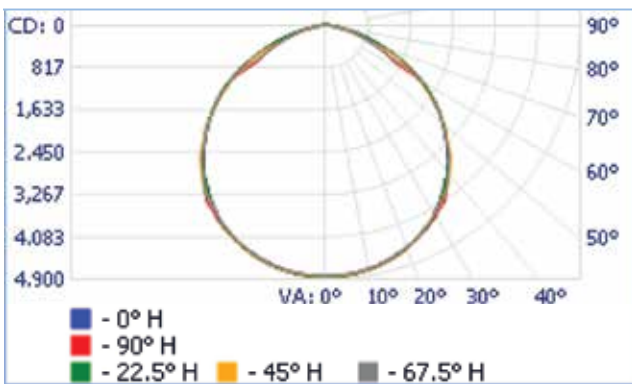

Illuminance at a Distance			
	Center Beam LUX	Beam Width	
8.3M	69.75 LUX	24.8M	25.3M
16.7M	17.44 LUX	49.7M	50.5M
25.0M	7.75 LUX	74.5M	75.8M
33.3M	4.36 LUX	99.3M	101.0M
41.7M	2.79 LUX	124.2M	126.3M
50.0M	1.94 LUX	149.0M	151.5M
■ Vert. Spread: 112.3° ■ Horiz. Spread: 113.1°			

Applications:

UFO Highbays using SMD chip technology are best suitable for the below applications.

- Warehouse Lighting
- Car Lot
- Factory Lighting
- Industrial Usage
- Area and storage lighting

Wiring Diagram:

